

Evolis Speed Indication Device

European Designed & Manufactured

With more than 8000 units installed world-wide, the Evolis Speed Indication Device is the product of choice for an all in one radar and data collection device. Not only does it present a sleek European design, it has also been built using the best components giving it a reputation for being one of the most energy efficient and reliable units in the market.

The Evolis Speed Indication Device is easily configured and installed to educate motorists of their travel speeds. It helps to reduce overall excess traffic speeds, particularly in high incident areas. Utilising the optional built in data logger, road asset owners can gather and analyse traffic speed data on specific roads so that they can make informed planning decisions on road safety.



Rugged

Efficient

Proven

Features



Rugged

- Anti-corrosion, anti-UV treatment plus unit sealing ensures long term resistance, strength and durability
- Injected ABS resin waterproof housing with integrated hooks
- Lockable permanent mounting bar made of injected ABS resin, mounted on poles with brackets (sold separately)
- Front face made of tough polycarbonate, fixed to the casing with mechanical clip and gasket seal
- Waterproof IP66 housing for 2 batteries, USB port, dial selector and power adaptor

Efficient

- Installed in minutes by one person
- Optional 1 or 2 way traffic flow statistics
- Optional pre-configured speed/text display settings prior to installation
- Accompanying EVOCOM software for settings configuration plus data analysis

Proven

- More than 8000 units installed world wide
- 34cm high speed digits (red/amber/green), a large amber text template and ultra-high brightness LEDs
- Optional Bluetooth connection so the operator can stay in the vehicle to change settings or download traffic data
- Optional 3G to communicate remotely from anywhere via a secure web interface

Technical Data



Radar Sensor

Doppler Radar:	24.125 Ghz
Detection range:	10-250 metres
Detection angle:	17 °
Accuracy:	+/- 1km/h (travelling at 100km/h)

Display

LED:	3 digits
Colors:	Red, Amber and Green
Size of digits:	340mm
Text display (Matrix):	640mm x 160mm (64 x 16 pixels) 1 line of 7 characters 160mm high 2 lines of 10 characters 70mm high
Visibility:	250m
Refresh:	1.2 seconds (configurable)

Housing

Dimensions:	H: 700mm x W: 709mm x D: 170mm
Housing:	Injected ABS resin, grey RAL 7035
Front face:	Polycarbonate
Waterproof:	IP66
Weight:	8kg (without batteries)

Connections

USB:	USB2
Wireless (Optional extra):	Bluetooth or 3G

Power Supply

Battery:	12V / 21Ah (sold separately)
Autonomy:	Matrix: 4 / 8 days
Recharge (Options):	Solar, Public lighting and Mains

NOTE: Posts and brackets sold separately. Standard recommended post and brackets are 76mm OD post and 3 x 300mm buckle straps.

Accessories (optional)



Touch pad 10" with Evocom/Evograph software pre-installed.

Evocom Software

Advanced Configuration & Statistic Analysis

Evocom PC software, provided free of charge, is featured with a user-friendly interface for advanced configuration: specific speed ranges, speed increments, data recording function (*), text messages, time slots etc...




(*Data recording function (one way / two way traffic flow statistics) purchased separately.

Optional Extras

- Bluetooth Connection
- 3G Connection
- One way Traffic Flow Statistics
- Two way Traffic Flow Statistics


Most options can be activated on-site without returning to i:TS by entering a software activation key (excludes 3G).

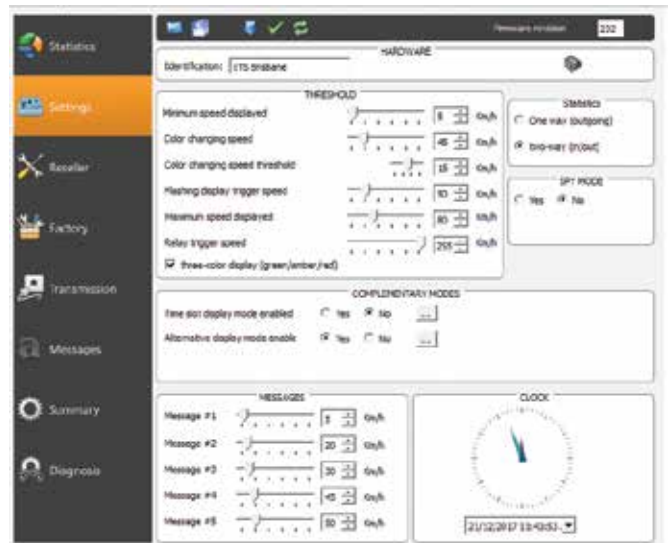

Settings configuration screen



Unit performance summary screen

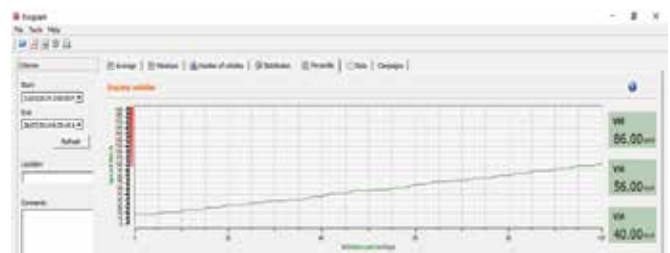

A wide variety of data analysis available



User Benefits

Evolis Solution Matrix



High Scalability

The later on-site add-on options (Bluetooth connection, statistics and double-sided statistics) enables the end-user to spread expenses over time and improve the product with new functionality.



Several Power Supply Options

Evolis Speed Indication Devices operate with standard 12V/21Ah batteries. Recharge options available are an independent charge, a mains and public lighting adaptor, or with a solar panel.



Quick & Safe Mounting

Thanks to its strong ultra-light injected ABS resin housing and mounting bar for existing pole, Evolis Speed Indication Devices can be installed rapidly.



Easy Data Processing

By connecting via USB, 3G or Bluetooth to Evolis, you can directly export traffic data and generate charts relating to the amount of incoming and outgoing vehicles, average and maximum speeds, distribution of vehicles by speed range and easily export data as MS Excel or Adobe PDF files.



Reliable & Resistant

Anti-corrosion, anti-UV treatment plus unit sealing ensures long term resistance, strength and durability.



Easy Set-Up

Evolis Speed Indication Devices feature a dial selector for immediate set-up according to pre-set speed zones. Intuitive Evocom software enables advanced configuration.



Evolis Speed Indication Device intuitively displays text messages according to detected speed.

i:TS Intelligent
Traffic Systems

Division of **Artcraft Pty Ltd**

FOR FREE QUOTE **1300 769 852**

84 Bluestone Circuit, Seventeen Mile Rocks QLD 4073 info@itsau.com.au