




PSLT-4000S

| | |
|--------------------|---|
| Description: | Compact and powerful portable solar light tower |
| Solar Panels: | 295 watts total / tilt up to 30deg |
| Luminosity: | Up to 42k lumens total |
| Mast Height: | 6096mm |
| Batteries: | 470 A/h wired in a 24V system |
| Travelling Length: | 3789mm |
| Travelling Width: | 1791mm |
| Operating Width: | 1791mm |
| Axle/Suspension: | 907kg |
| Travelling Height: | 2559mm |
| Operating Height: | Adjustable up to 6096mm |
| Weight (approx.): | 710kg |




Technical Data

Light Emission Patterns

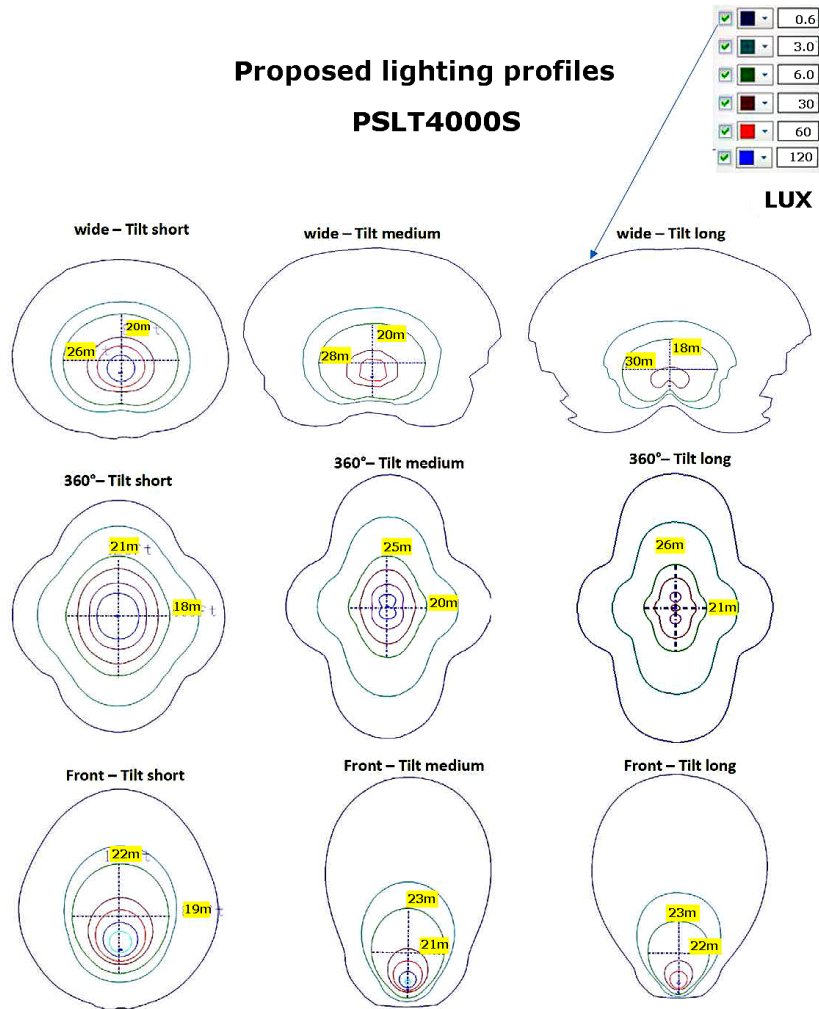

Battery Life Expectancy

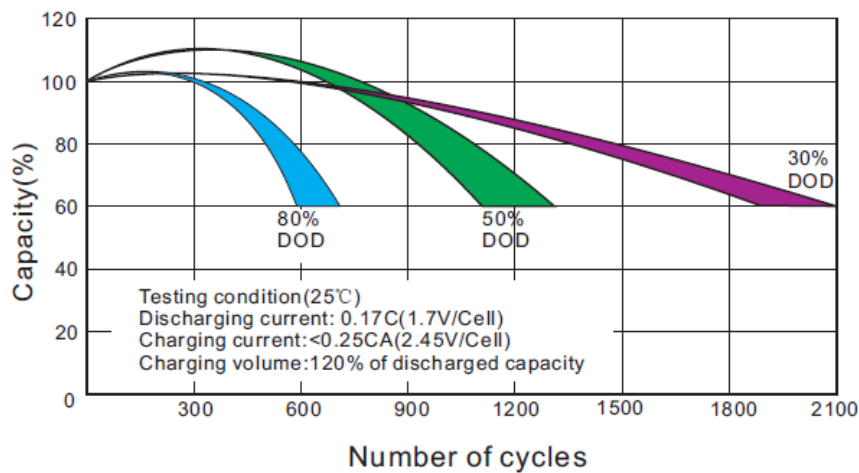

*Note: Regulators will disconnect power at 80% DOD

| | |
|--------------------------------|--------------------|
| Low Level Brightness Runtime: | 17 Days |
| Mid Level Brightness Runtime: | 7.2 Days |
| High Level Brightness Runtime: | 6.28 Days |
| Re-charge Time: | 17 Hours (@ 25deg) |

*Note: Runtime is based on standard 8hr work shifts